

WATER GEM REPLACEMENT FILTER

SIMPLE STEP-BY-STEP FITTING INSTRUCTIONS

1. Place a bowl underneath the filter to prevent any water spillage.
2. Locate the Saddle Valve and turn the handle in a clockwise direction until it stops. (Diagram A)
3. Open the tap and wait until the water stops running. This relieves any pressure in the system.
4. Hold the existing Filter Cartridge with one hand.


5. Remove the inlet adaptor (Red Tubing) by pushing down the grey ring whilst simultaneously pulling the adaptor body. (Diagram B)

6. Repeat the procedure at the other end of the filter.
7. Before fitting the new Filter, print the installation date in the space provided.

8. Remove dust caps from the new filter and, making sure that the flow arrow is in the correct direction (arrow pointing towards the tap), push the adaptors firmly onto the Filter.

9. Turn on the water supply by the Saddle Valve in an anti-clockwise direction. Check for leaks.

10. Before use, flush at least 20 litres of water through the system. The water may be greyish in colour at first, which is quite normal. The discolouring is due to excess harmless G.A.C. being rinsed through the filter.

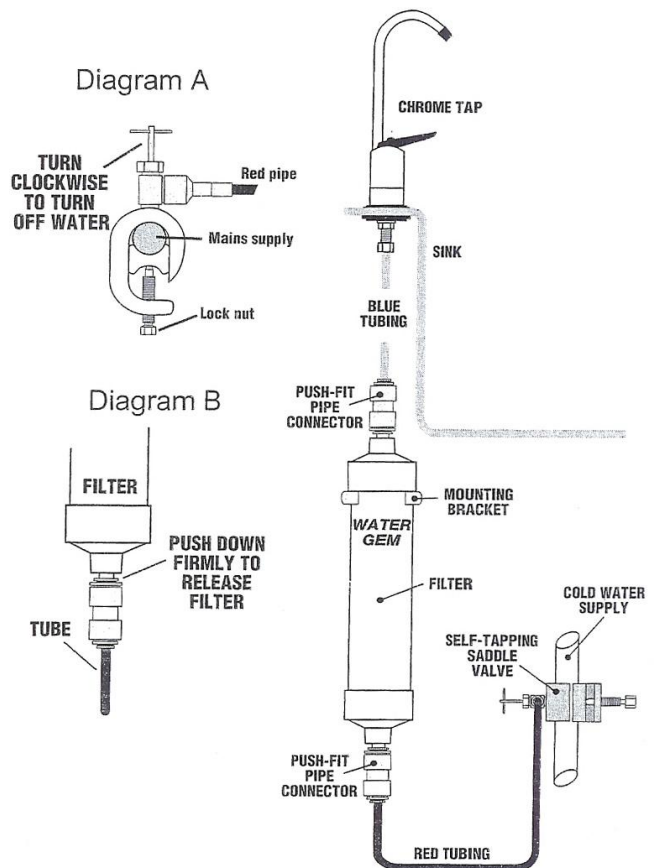

FOR BEST PERFORMANCE ALWAYS RUN "UNTIL CHILL TO TOUCH"